



Solar Street Light

ML-7000-1250-201/16

Solar Street Light

Mutian solar street light features an integrated battery enclosure and your choice of luminaire. A specially designed solar pole meets wind loads and the luminaire. The system is configured according to your location and lighting requirements to run throughout the night.

WHY SOLAR?



REMOTE LOCATIONS

- Where grid is difficult to access



IMMEDIATE ENERGY SAVINGS

- No energy costs throughout life of product



LOWER INSTALLATION COSTS

- No trenching or cabling
- Shorter installation time compared to on grid systems

OUR DIFFERENCE

INDUSTRY-LEADING EXPERTISE

- Field leader in solar LED lighting solutions, since 2008

ADVANCED LIGHTING TECHNOLOGY

- Designed for lighting applications

CUSTOM SOLUTION FOR YOUR APPLICATION

- Precision-engineered for your application



Mutian Solar Energy Sciencetech Company

No. 5699, North Second Ring Road, Baoding, China

www.solarmt.com | Tel: +86-312-3917316 | Fax: +86-312-3917315 | Email: sales@solarmt.com

Solar Street Light Parameter

Product name	Solar Street light	
Model No.	ML3200-1215-102	
Performance	Lighting time per day	12hours (4h full power mode+8h half dimming mode)
	Autonomy days	3 days
Solar Modules	Power (Wp)	50Wp (17.2V50Wp×1pcs)
	Type	Poly crystalline silicon
	Dimension	603mm/670mm/25mm
	Weight	5.3kg
Light Luminaire	Material	Aluminum die casting & Toughened glass
	Operating Temperature	-40℃~75℃
	Power	15W
	Lumens	1800 Lm
	LED Chip	Bridgelux LED chips with high brightness, or customized
	Color Temperature	3000-7200K(warm white/pure white/cold white)
	Operating temperature	-40℃~70℃
Lighting Pole	Height	3.2m
	Material	Q235
	Surface Treatment	Hot-dip galvanizing, Static spray for led solar street light
Battery	Capacity	60AH (12V60AH×1pcs)
	Type	Gel/Lead-acid Battery
	Dimension	350mm/166mm/174mm
	Weight	18.1kg
Controller	Rated voltage and current	12V/10A
	Weight	0.165Kg
	Control mode	Light control + time control
	IP level	IP67
	Protective Function	overcharging, discharging, voltage surge, reverse polarity, etc.
Accessories	Cable	2.5mm ² 11m
	Battery Box	60AH waterproof ABS battery box 1 pc
	Foundation Kit	Dismountable foundation kit, saving in shipping

Mutian Solar Energy Sciencetech Company


No. 5699, North Second Ring Road, Baoding, China

www.solarmt.com | Tel: +86-312-3917316 | Fax: +86-312-3917315 | Email: sales@solarmt.com

Product Details



Light Luminaire

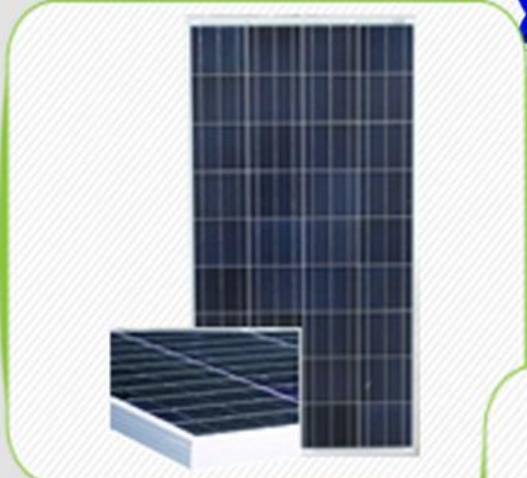

Solar Modules



Battery and Box



Controller

Easy Installation



Mutian Solar Energy Sciencetech Company

No. 5699, North Second Ring Road, Baoding, China

www.solarmt.com | Tel: +86-312-3917316 | Fax: +86-312-3917315 | Email: sales@solarmt.com